



AVantage® Liquid Photopolymers meet the stringent demands of flexographic printing.

OUR LIQUID
PHOTOPOLYMER RESINS
ARE FORMULATED TO
DELIVER OPTIMUM
ELASTICITY, RESILIENCE,
HARDNESS AND INK
TRANSFER.

### **AVBAG**

Ideal for the multi-wall bag industry. Provides excellent print results on both paper and poly bags.

### **AVCAP**

Designed to produce capped printing plates that dramatically improve print quality and performance.

### **AVCORRUGATED**

Specifically formulated for corrugated applications and is a highly resilient, durable plate that provides excellent ink transfer.

### **AVMASTER**

Excellent results where hardness and clear definition of character is required. AVMaster (AVM) liquid photopolymer is specifically formulated for molding applications, and is a durable plate that provides excellent imaging characteristics.

### **AVSTAMP**

The perfect solution for stamps where consistent and crisp ink transfer is needed. The clarity and overall UV stability with this resin is unmatched in the industry today.

### **AVSTAR INKJET FILM**

Designed to produce high-quality, high-density film negatives and positives.

### **ANCILLARY ITEMS**

Complete line of ancillary items to compliment the complete line of AVantage® Liquid Photopolymer.

### **AVBAG**



AVBag (AVB) is specifically formulated for multi-wall bag and poly bag applications and is a highly resistant, durable plate that provides excellent ink transfer. AVB is a 60 Shore A durometer plate with a wide imaging latitude and delivers exceptional results from the most demanding artwork.

AVB is compatible with most water-based and glycol-based inks.



#### **APPLICATIONS**

Multi-Wall/Poly Bag

#### **BENEFITS**

- Excellent press printability / plate run durability.
- · Low tack plate throughout, clean running on press
- UV, heat, and humidity stable.
- · Highly resilient plate with excellent ink transfer.
- Wide exposure latitude, deep reverses.
- Optional GPX finishing.
- Press ready plate in less than one (1) hour and requires significantly less time than sheet plates.
- Material costs are much less than sheet plates and more than competitive with other liquid products.
- Easy mounting on printing presses and easy to handle/store.
- Good dimensional stability, polyester backed very tack free plate.
- Wide imaging latitude delivers exceptional results from the most demanding artwork.
- Environmentally friendly; a truly sustainable product for our time.

#### **STORAGE**

Proper storage will extend plate life. Plates should be cleaned thoroughly after each press run and stored away from light in a cool, dry place with a relative humidity of approximately 60%.

#### **INK / SOLVENT COMPATIBILITY**

AVB is compatible with most water-based and glycol-based inks.

#### **SPECIFICATIONS**

#### Reproduction capabilities:

Image halftones: 3 to 95% at 120 lines/in.

Isolated dots: .005 in. diameter Fine lines: .003 in. width

#### Processing data:

AVB is designed for use with all competitive detergent, defoamer, and developer. AV washout chemistry is also available.

#### Recommended times:

Back exposure 30 to 120 seconds Main exposure 3 to 7.5 minutes Washout 5 to 10 minutes Post exposure 10 minutes Drying, less than 30 minutes

#### Appearance:

Red color

#### Thickness:

Gauge: 0.067 - 0.125 in.

Floor thickness: 0.035 – 0.080 in. Relief depth: 0.032 – 0.045 in.

#### Hardness:

AVB is available in 60 Shore A durometer.

#### Product availability:

AVB is available in 40 lb. delts, net weight. This product can also be shipped in 2,000 lb. totes.


### **AVCAP**

Liquid capping resin dramatically improves print quality and performance.

AVantage® Capping Resin (AVCAP) is designed for use with AVantage® liquid photopolymers to produce capped printing plates that dramatically improve print quality and performance.

AVCAP is formulated for multi-wall, folding carton, corrugated applications and wide web applications. The addition of AVCAP during the plate-making process creates liquid photopolymer plates that can image the finest details while maintaining clean, open reverses.

The 70 durometer (Shore A) AVCAP resin broadens overall tone range capability, improves ink transfer, reduces dot gain, and provides excellent coverage of solids while minimizing fluting.

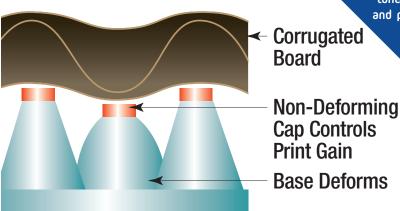

#### **APPLICATIONS**

Multi-Wall Bag Folding Carton Corrugated

#### **BENEFITS**

- Dramatically improves print quality.
- Extended plate life with regards to impression count.
- Significant reduction in fluting.
- Wider exposure latitude, deep reverses.
- Improved tonal range: 2-95% at 133 lpi.
- Allows the flexibility to produce both solids and halftones within the same plate.

#### **STORAGE**

Proper storage will extend plate life. Plates should be cleaned thoroughly after each press run and stored away from light in a cool, dry place with a relative humidity of approximately 60%.

#### **INK / SOLVENT COMPATIBILITY**

AVB is compatible with most water-based and glycol-based inks.

#### **SPECIFICATIONS**

#### Hardness:

70 Shore A durometer

#### Appearance:

Red color

#### Cap thickness:


0.005 - 0.010

#### Tone range reproduction:

2 – 95% Line screen: 133 lpi, max

#### Product availability:

AVCAP is available in 40 lb. delts.



## **AVCORRUGATED**

The perfect solution for corrugated printing. AVCorrugated (AVC) is specifically formulated for corrugated applications and is a highly resilient, durable plate that provides excellent ink transfer. AVC is a 25 or 34 Shore A durometer plate with a wide imaging latitude and delivers exceptional results from the most demanding artwork.

AVC is compatible with most water-based and glycol-based inks.

#### **APPLICATIONS**

Corrugated

2 Products:

NTR is a germicidal light finished plate.

#### **BENEFITS**

- Excellent press printability / plate run durability.
- Low tack plate throughout, clean running on press.
- UV, heat, and humidity stable.
- Highly resilient plate with excellent ink transfer.
- Wide exposure latitude, deep reverses.
- Material costs are much less than sheet plates and more than competitive with other liquid products.
- Easy mounting on printing presses. "I PLATES" or Modified IPLATES are easy to handle / store.
- Good dimensional stability, polyester backed very tack free plate.
- Wide imaging latitude delivers exceptional results from the most demanding artwork.
- Environmentally friendly. A truly Sustainable product for our time.
- AVC is available in two options to specifically meet your production needs. A non-germicidal option that includes a detacking solution and an option that detacks in under germicidal lamp

#### **STORAGE**

Plates can be stored in a cool and dry place with a relative humidity of approximately 60%, or in the conventional manner used by most corrugaters.

#### **INK / SOLVENT COMPATIBILITY**

AVC is compatible with most water-based and glycol-based inks.

#### **SPECIFICATIONS**

#### Reproduction capabilities:

Image halftones: 3 to 95% at 65 lines/in. Isolated dots: 0.006 in. diameter

Fine lines: 0.004 in. width

#### Processing data:

AVC is designed for use with all competitive detergent, defoamer and developer. AV washout chemistry is also available.

#### Recommended times:

Back exposure 90 to 180 seconds Main exposure 5 to 7.5 minutes Washout 10 to 15 minutes Post exposure 10 to 15 minutes Drying, less than 30 minutes

#### Appearance:

Red

#### Thickness:

0.125 - 0.250 in. Floor thickness: 0.080 - 0.125 in. Relief depth: 0.045 - 0.125 in.

#### Hardness:

AVC is available in 25 or 34 Shore A durometer.

#### Product availability:

AVC is available in 40 lb. delts, net weight. This product can also be shipped in 2,000 lb. totes.

## **AVMASTER**

The molding industry's premier master material.

AVMaster (AVM) is specifically formulated for molding applications and is a durable plate that provides excellent imaging characteristics. AVM is a 80 Shore A durometer plate with a wide imaging latitude and delivers exceptional results from the most demanding artwork.



#### **APPLICATIONS**

Master/Molding

#### **BENEFITS**

- Exceptional imaging quality where fine detail is required.
- · Low tack plate throughout.
- UV, heat, and humidity stable.
- Wide exposure latitude, deep reverses.
- Material costs are much less than sheet plates and more than competitive with other liquid products.
- Good dimensional stability, polyester backed very tack free plate.
- Wide imaging latitude delivers exceptional results from the most demanding artwork.
- Environmentally friendly; a truly sustainable product for our time.
- Excellent durability.

#### **STORAGE**

Proper storage will extend plate life. Plates should be cleaned thoroughly after use and stored away from light in a cool, dry place with a relative humidity of approximately 60%.

#### **SPECIFICATIONS**

#### Reproduction capabilities:

Image halftones: 2 to 95% at 85 lines/in. Isolated dots: .015 in. diameter Fine lines: .010 in. width

#### Processing data:

AVM is designed for use with all competitive detergent, defoamer, and developer. AV washout chemistry is also available.

#### Recommended times:

Back exposure 30 to 120 seconds Main exposure 3 to 7.5 minutes Washout 5 to 10 minutes Post exposure 10 minutes Drying, less than 30 minutes

#### Appearance:

Clear to Bronze color

#### Thickness:

Gauge: 0.067 - 0.125 in. Floor thickness: 0.035 - 0.080 in. Relief depth: 0.032 - 0.095 in.

#### Hardness:

AVM is available in 80 Shore A durometer.

#### Product availability:

AVM is available in 40 lb. delts, net weight. This product can also be shipped in 2,000 lb. totes.

### **AVSTAMP**



The stamp industry's solution... when yellowing resistance and clarity are essential.

AVStamp (AVS) is specifically formulated for the stamp industry and combines yellowing resistance with UV stability for impressive flexibility and durability. AVS is a 50 Shore A durometer plate designed for the craft, hobby, and scrapbook markets.

AVS is compatible with most water-based and glycol-based inks.

#### **APPLICATIONS**

Stamp

#### **BENEFITS**

- High flexibility.
- Medium tack.
- · UV, heat, and humidity stable.
- Highly resilient plate with excellent ink transfer.
- Non-yellowing.
- Exceptional clarity.
- Good dimensional stability, polyester backed.
- Wide imaging latitude delivers exceptional results from the most demanding artwork.
- Environmentally friendly; a truly sustainable product for our time.

#### **STORAGE**

Proper storage will extend plate life. Plates should be cleaned thoroughly after use and stored away from light in a cool, dry place with a relative humidity of approximately 60%.

#### **INK / SOLVENT COMPATIBILITY**

AVS is compatible with most water-based and glycol-based inks.

#### **SPECIFICATIONS**

#### Reproduction capabilities:

Image halftones: 5 to 90% at 100 lines/in. Isolated dots: .010 in diameter

Fine lines: .007 in width

#### Processing data:

AVS is designed for use with all competitive detergent, defoamer, and developer. AV washout chemistry is also available.

#### Recommended times:

Back exposure 30 to 90 seconds Main exposure 3 to 6 minutes Washout 5 to 10 minutes Post exposure 10 minutes Drying, less than 30 minutes

#### Appearance:

Clear color

#### Thickness:

Gauge: .107 in.

Floor thickness: .062 in. Relief depth: .045 in.

#### Hardness:

AVS is available in 50 Shore A durometer.

#### Product availability:

AVS is available in 40 lb. delts, net weight. This product can also be shipped in 2,000 lb. totes.

# **AVSTAR**

Designed to produce high-quality, high-density film negatives and positives.

avSTAR gloss and avSTAR2 matte ink jet film is universally receptive to both dye and pigment ink. Durable and cost-effective, avSTAR ink jet films are designed for maximum performance and are the ideal substrate for your printing requirements.

#### avSTAR INK JET FILM DELIVERS:

- Consistent, repeatable and high-resolution output with sharper dots for superior halftone reproduction and solids with greater density.
- Environmentally Friendly avSTAR ink jet films eliminate the use of harmful chemicals including developers and fixing solutions. They are good for your employees and the environment.

avSTAR2 matte ink jet films are offered in 24" and 44" widths in 100' rolls (5 or 8 mil) to meet all liquid and sheet photopolymer needs.





# AVCOV

Matte & Clear Cover Film

AVantage matte & clear cover film is easy to handle and easy to work with during photopolymer platemaking. The matte finish of this film creates a unique, microscopic finish to the printing plate that reduces tack and improves ink transfer.



## **AVSUB**

Plate substrates with a polyester backing sheet that offers excellent adhesion. AVantage® 4 and 7 mil plate substrates are a polyesterbased backing sheet and offer excellent adhesion to AVantage® liquid photopolymers for conventional and in-position plates for flexographic printing. Substrate sizes available to fit all popular photopolymer equipment.

Available in boxes of 100 or in rolls of 1700 ft Custom sizes and volumes available on request.



## **AVDEV**



Liquid developer maintains consistent developer formulation.

AVantage® Liquid Developer serves as a dispersant to ensure a consistent formulation of the developer bath (comprised of AVWashout Solution and AVDefoamer) required to process liquid photopolymer printing plates.

Packaged in 5-gallon plastic delts.

# **AVSALT**

Post exposure salt that facilitates detacking photopolymer plates.

AVantage® Post Exposure Salt facilitates the detacking of AVantage® liquid photopolymer printing plates. AVSALT is mixed with warm water in the post exposure solution tray. The photopolymer plate is then submerged in the post exposure solution and exposed to ultraviolet light to complete the detacking process.

Packaged in 5 lb. plastic containers.





# **AVDEFOAM**

Defoamer minimizes foam to improve spray pressure and washout effectiveness.

AVantage® Defoamer is a silicone emulsion defoamer that minimizes foam in developer baths that use AVantage® Washout Solution or similar detergent. Reducing foam in the developer bath improves the spray pressure required to effectively wash out resin from AVantage® liquid photopolymer printing plates after the exposure process.

Packaged in 5-gallon delts.

## **AVWASHOUT**

Washout solution that breaks Down and Emulsifies Photopolymer Resin.

AVantage® Washout Solution is a specially formulated liquid detergent that breaks down and emulsifies AVantage® liquid photopolymer resin during the washout cycle. It has superior chemistries that ensure a clean and consistent washout each and every time.

Packaged in 5-gallon plastic delts.



